

Temperature-Controlled HOSE SYSTEM

Welcome to Becker Robotic, where innovation meets reliability!

With over 30 years of experience, headquartered in Germany and supported by a strong global presence, we provide advanced technology solutions for modern industrial applications. Our portfolio includes energy supply systems, robotic equipment, engineering services, motion and stationary cables, and high-quality industrial equipment.

Through our worldwide network, we deliver reliable, high-quality solutions to industrial customers across the globe. From product development and engineering design to manufacturing, project support, installation, and system optimization, we offer end-to-end services that enhance performance and maximize uptime in automated production environments.

Partner with us to drive innovation and shape the future of automation.


Table of Contents

Features	04
Dimensions	05
Maximum Operating Power	05
Power Connection	06
End Cap Options	07
Hose Options	08
Fitting Options	10
Adaptors	11
Installation of Temperature Controlled Hose	21
Safety Instructions	22

Overview

Our high pressure temperature-controlled hoses are designed to provide accurate and stable temperature regulation for demanding applications of various fluids. Built with different options of high pressure PTFE liner layered with durable steel braiding, it delivers reliable performance even in demanding motion applications. The integrated, abrasion-resistant heating element ensures consistent heat distribution, while the protective corrugated tubing adds longevity and durability.


Fully compatible with Becker mounting fixtures, the system installs quickly and seamlessly—providing a dependable solution designed for real-world use.

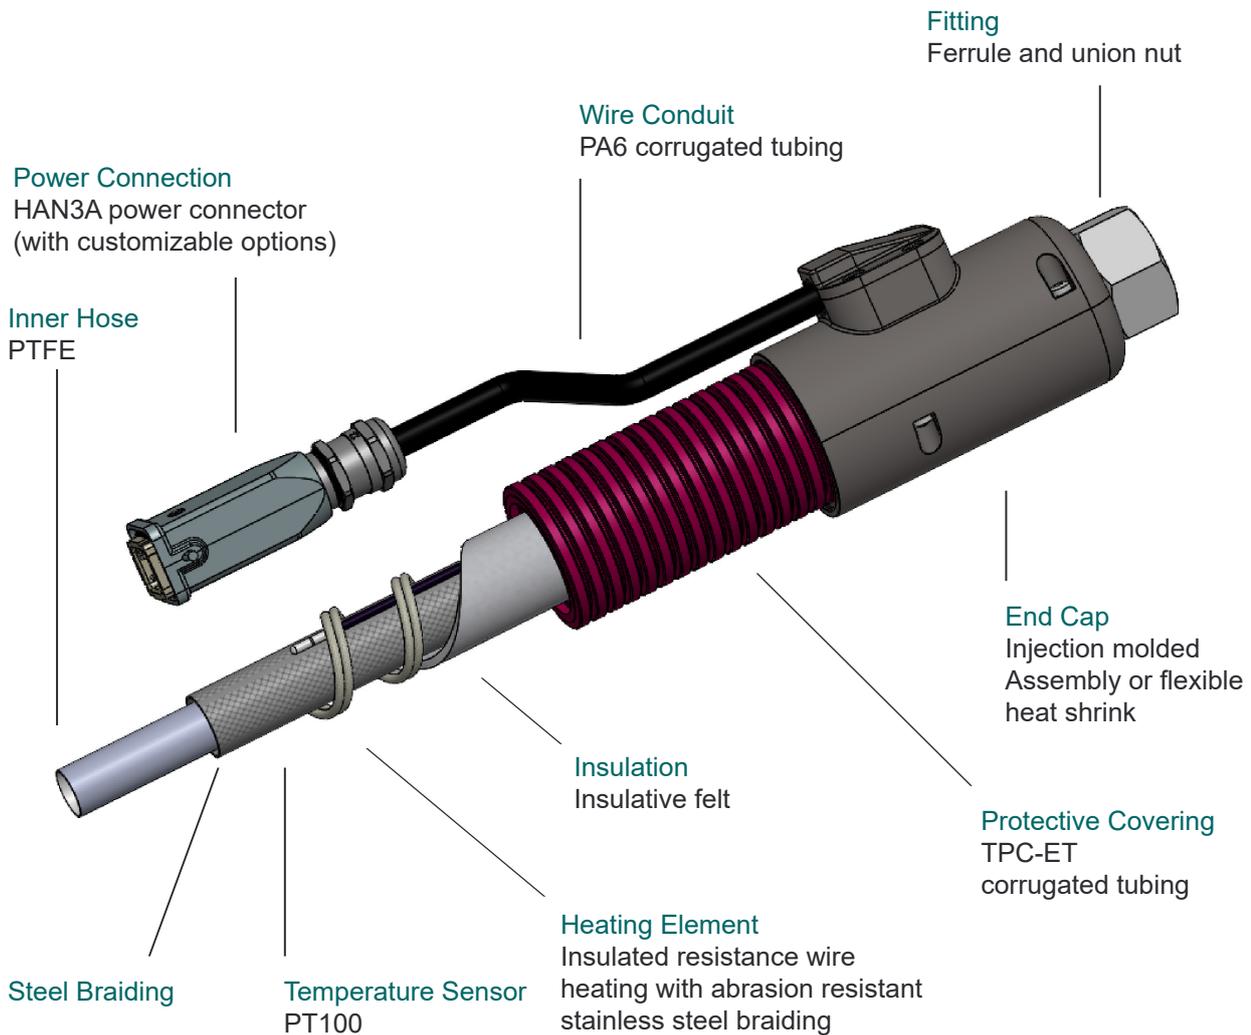

Features

- Silicon free
- Suitable for dynamic environments
- Robust construction with high quality and durable materials
- Designed for seamless connectivity with all major heating controller manufacturers
- Variety of fittings, lengths, pressure ratings, and customization options
- Max operating temperature of 100°C

Dimensions (mm)

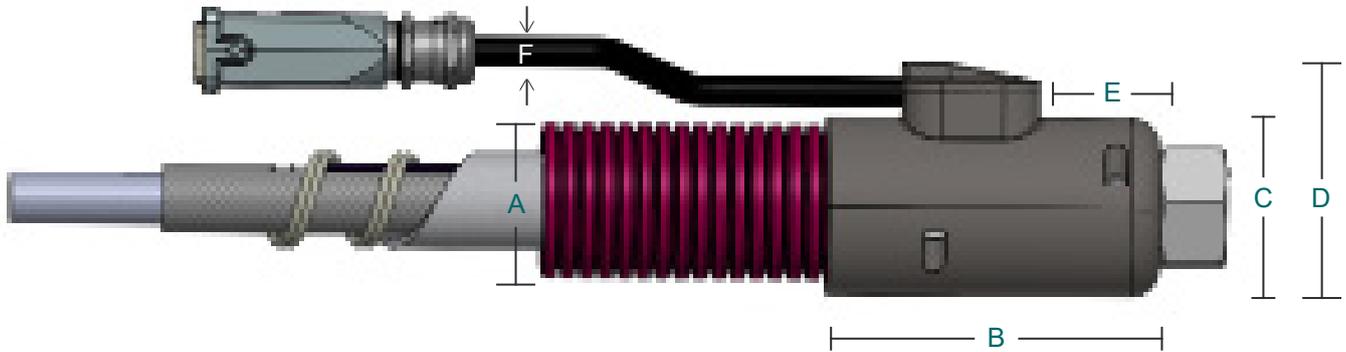

DN		10	12	13	16	20	25
A	Corrugated Tubing Nominal Diameter	42.3			54.2		79.5
		(NW36)			(NW48)		(NW70)
B	Injection Molded Assembly End Cap Length	110					
	Heat Shrink End Cap Length	140					
C	End Cap Outer Diameter	59.5			59.5		84.6
D	End Cap Profile with Cap	77.9			77.9		102.5
E	Length End Cap to Union Nut	40					
F	Wire Conduit Outer Diameter	13					


- Tolerances of length +/-2% and tolerances of diameter +/-5% as per ISO 3302-1

Maximum Operating Power

Voltage (V)	DN	10	12	13	16	20	25
230	Power (W/m)	180	180	240	240	240	400
	Max Length (m)	10	10	9.5	9.5	5.5	5.5

Power Connection

Standard Plug Specification

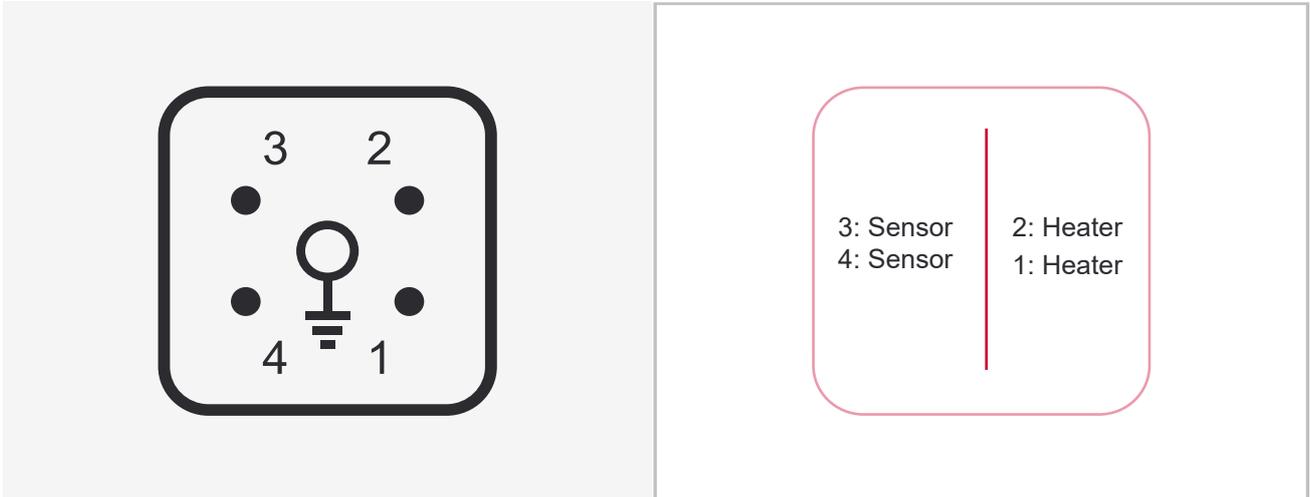


- Features HAN3A as the standard power connector.
(We offer tailored connection solutions to meet specific project requirements)

End Cap Options

Rigid End Cap Assembly

- 3 piece injection molded assembly
- Secured with steel fasteners
- Internal epoxy adhesive to prevent rotation

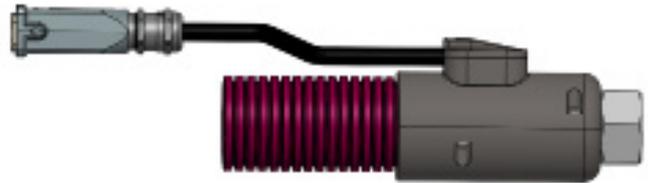

Heat Shrink End Cap Assembly

- Dual wall heat shrink
- Adhesive lined
- Internal epoxy adhesive to prevent rotation



Hose Options

TN1 Hose

Inner PTFE and 1-layer stainless steel braiding

DN	Bend Radius (mm)	Working Pressure (bar)
10	120	150
12	135	145
13	135	145
16	160	125
20	210	95
25	260	70

T1 Hose

Inner PTFE heavy wall and 1-layer stainless steel braiding

DN	Bend Radius (mm)	Working Pressure (bar)
10	120	175
12	135	150
13	135	150
16	160	135
20	200	100
25	250	80

T2 Hose

Inner PTFE heavy wall and 2-layer stainless steel wire braiding


DN	Bend Radius (mm)	Working Pressure (bar)
10	120	225
12	135	190
13	135	190
16	160	175
20	200	150
25	250	130

T3 Hose

Inner PTFE, 2-layer high tensile steel wire braiding, and 1-layer steel wire braiding


DN	Bend Radius (mm)	Working Pressure (bar)
10	110	475
12	150	450
13	150	450
16	175	400
20	200	300
25	240	275

Fitting Options

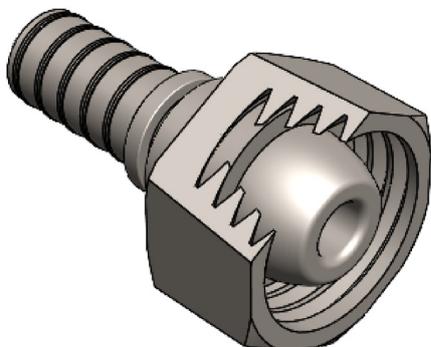

DKL-T Fitting

Swivel female for connectors with 24°/60°

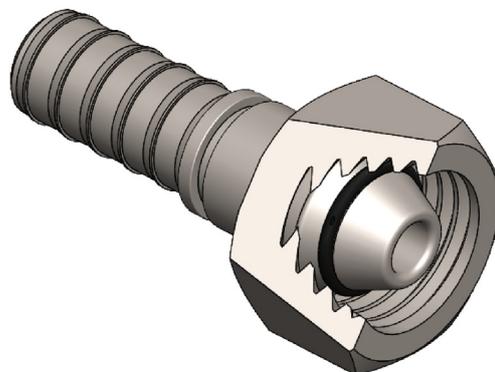


DKOL-T Fitting

Swivel female with O-Ring for connectors with 24°. Also available in elbow 45°/90°

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	M18x1.5	22	250
12	M22x1.5	27	250
13	M22x1.5	27	250
16	M26x1.5	32	160
20	M30x2	36	160
25	M36x2	41	100

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	M18x1.5	22	250
12	M22x1.5	27	250
13	M22x1.5	27	250
16	M26x1.5	32	160
20	M30x2	36	160
25	M36x2	41	100

Fitting Options

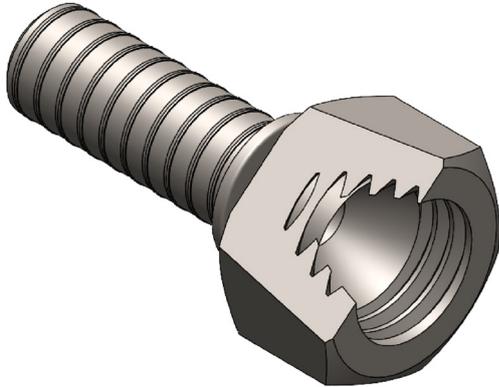


DKJ-T Fitting

JIC swivel female 74°, union nut UNF

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	UNF 3/4-16	22/24	240
12	UNF 3/4-16	22/24	240
12	UNF 7/8-14	* 27/32	210
13	UNF 3/4-16	22/24	240
13	UNF 7/8-14	* 27/32	210
16	UNF 7/8-14	27/32	210
16	UNF 1 1/16-12	32	170
20	UNF 1 1/16-12	32	170
25	UNF 1 5/16-12	41	140

* DN12 and DN13 UNF 7/8 - 14 fittings must order OD 27mm for NW36 corrugated fit

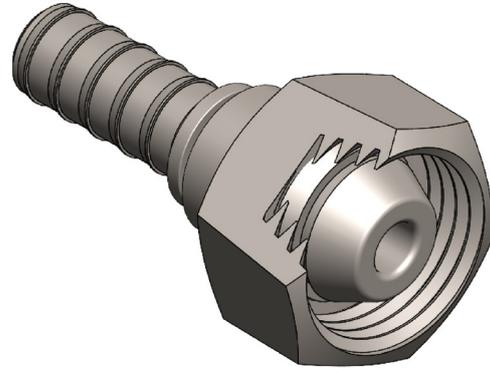


DKR-T Fitting

Swivel female, union nut ISO 228/1

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	G 3/8"	19	350
10	G 1/2"	24/27	315
12	G 1/2"	24/27	315
13	G 1/2"	24/27	315
16	G 3/4"	32	250
20	G 1"	* 41	200
25	G 1"	41	200
25	G 1 1/4"	50	160

* DN20 G 1" fitting requires NW70 corrugated tubing

Fitting Options

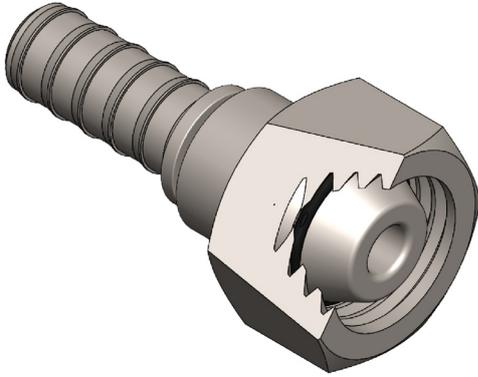


DKOS-T Fitting

Tapered nipple with O-Ring for fittings with 24°

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	M22x1.5	27	400
12	M24x1.5	30	400
13	M24x1.5	30	400
16	M30x2	36	400
20	M36x2	* 46	400
25	M42x2	50	250

* DN20 M36X2 fitting requires NW70 corugated tubing

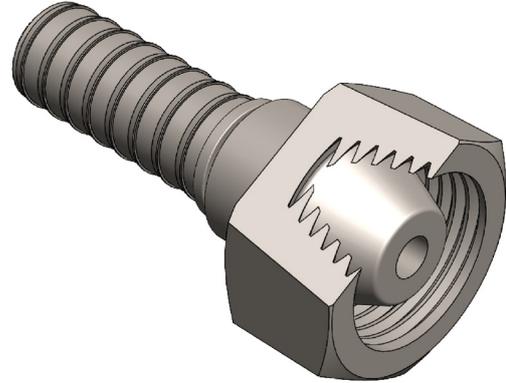

DKS-T Fitting

Swivel female for connectors with 24°

DN	Thread	Outer Diameter (mm)	Working Pressure (bar)
10	M22x1.5	27	400
12	M24x1.5	30	400
13	M24x1.5	30	400
16	M30x2	36	400
20	M36x2	* 46	400
25	M42x2	50	250



* DN20 M36X2 fitting requires NW70 corugated tubing

Fitting & Ferrule Material Options

Other materials available by request

Materials	Specifications
Carbon Steel	CR VI Free Coatted
Sainless Steel	Grade V2A 1.4305
Sainless Steel	Grade V4A 1.4571

Adaptors

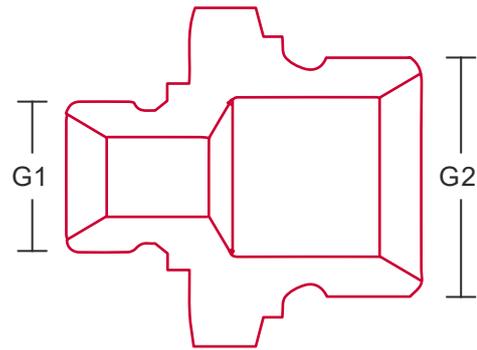

DKR-T Adaptors: Steel



Union connector, ISO 8434-6, ARJ 60°, straight, steel

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	* Min Torque (Nm)
G 1/8" -28	G 1/8" -28	400	10
G 1/8" -28	G 1/4" -19	400	10
G 1/8" -28	G 3/8" -19	400	10
G 1/8" -28	G 1/2" -14	350	10
G 1/4" -19	G 1/4" -19	400	20
G 1/4" -19	G 3/8" -19	400	20
G 1/4" -19	G 1/2" -14	350	20
G 1/4" -19	G 5/8" -14	350	20
G 1/4" -19	G 3/4" -14	315	20
G 1/4" -19	G 1" -11	250	20
G 1/4" -19	G 1.1/4" -11	200	20
G 3/8" -19	G 3/8" -19	400	35
G 3/8" -19	G 1/2" -14	350	35
G 3/8" -19	G 5/8" -14	350	35
G 3/8" -19	G 3/4" -14	315	35
G 3/8" -19	G 1" -11	250	35
G 3/8" -19	G 1.1/4" -11	200	35
G 1/2" -14	G 1/2" -14	350	60
G 1/2" -14	G 5/8" -14	350	60
G 1/2" -14	G 3/4" -14	315	60
G 1/2" -14	G 1" -11	250	60
G 1/2" -14	G 1.1/4" -11	200	60

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	* Min Torque (Nm)
G 1/2" -14	G 1.1/2" -11	160	60
G 1/2" -14	G 2" -11	125	60
G 5/8" -14	G 5/8" -14	350	70
G 5/8" -14	G 3/4" -14	315	70
G 5/8" -14	G 1" -11	250	70
G 5/8" -14	G 1.1/4" -11	200	70
G 3/4" -14	G 3/4" -14	315	115
G 3/4" -14	G 1" -11	250	115
G 3/4" -14	G 1.1/4" -11	200	115
G 3/4" -14	G 1.1/2" -11	160	115
G 3/4" -14	G 2" -11	125	115
G 1" -11	G 1" -11	250	140
G 1" -11	G 1.1/4" -11	200	140
G 1" -11	G 1.1/2" -11	160	140
G 1" -11	G 2" -11	125	140
G 1.1/4" -11	G 1.1/4" -11	200	210
G 1.1/4" -11	G 1.1/2" -11	160	210
G 1.1/4" -11	G 2" -11	125	210
G 1.1/2" -11	G 1.1/2" -11	160	290
G 1.1/2" -11	G 2" -11	125	290
G 2" -11	G 2" -11	125	400

* Recommended minimum torques should not be exceeded by more than 10% during assembly

Adaptors

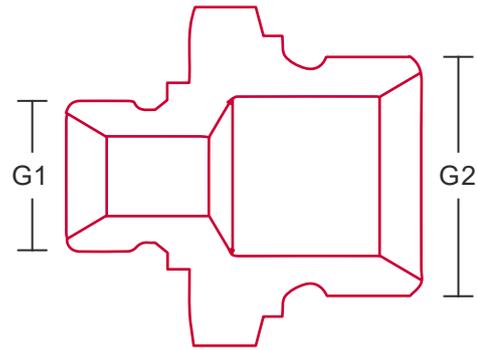

DKR-T Adaptors: Stainless Steel



Union connector, ISO 8434-6, ARJ 60°, straight, stainless steel

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	* Min Torque (Nm)
G 1/8"-28	G 1/8"-28	400	10
G 1/8"-28	G 1/4"-19	400	10
G 1/8"-28	G 3/8"-19	400	10
G 1/4"-19	G 1/4"-19	400	20
G 1/4"-19	G 3/8"-19	400	20
G 1/4"-19	G 1/2"-14	400	20
G 1/4"-19	G 3/4"-14	400	20
G 3/8"-19	G 3/8"-19	400	35
G 3/8"-19	G 1/2"-14	400	35
G 3/8"-19	G 5/8"-14	400	35
G 3/8"-19	G 3/4"-14	400	35
G 3/8"-19	G 1"-11	400	35
G 1/2"-14	G 1/2"-14	400	60
G 1/2"-14	G 5/8"-14	400	60
G 1/2"-14	G 3/4"-14	400	60
G 1/2"-14	G 1"-11	400	60
G 1/2"-14	G 1 1/4"-11	200	60

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	* Min Torque (Nm)
G 5/8"-14	G 5/8"-14	400	70
G 5/8"-14	G 3/4"-14	400	70
G 3/4"-14	G 3/4"-14	400	115
G 3/4"-14	G 1"-11	400	115
G 3/4"-14	G 1 1/4"-11	200	115
G 3/4"-14	G 1 1/2"-11	200	115
G 1"-11	G 1"-11	400	140
G 1"-11	G 1 1/4"-11	200	140
G 1"-11	G 1 1/2"-11	200	140
G 1"-11	G 2"-11	100	140
G 1 1/4"-11	G 1 1/4"-11	200	210
G 1 1/4"-11	G 1 1/2"-11	200	210
G 1 1/4"-11	G 2"-11	100	210
G 1 1/2"-11	G 1 1/2"-11	200	290
G 1 1/2"-11	G 2"-11	100	290
G 2"-11	G 2"-11	100	400

* Recommended minimum torques should not be exceeded by more than 10% during assembly

Adaptors

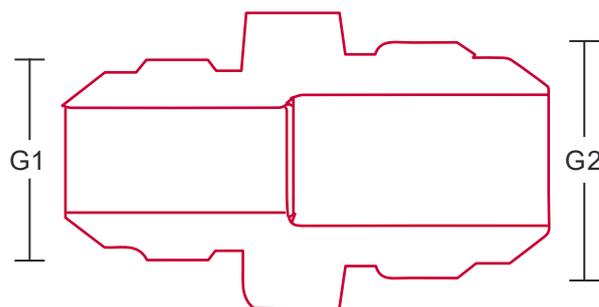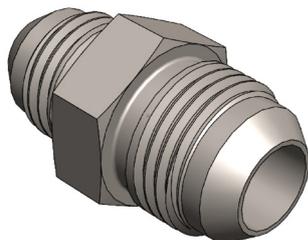

DKJ-T Adaptors: Steel

Union connector, ISO 8434-2, AGJ 37°, straight, steel

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	Min Torque * (Nm)
UNF 3/8" -24	UNF 3/8" -24	250	N/A
UNF 3/8" -24	UNF 7/16"-20	250	N/A
UNF 7/16" -20	UNF 7/16"-20	250	15
UNF 7/16" -20	UNF 1/2"-20	250	15
UNF 7/16" -20	UNF 9/16"-18	200	15
UNF 7/16" -20	UNF 3/4"-16	200	15
UNF 7/16" -20	UNF 7/8"-14	160	15
UNF 1/2" -20	UNF 1/2"-20	250	19
UNF 1/2" -20	UNF 9/16"-18	200	19
UNF 1/2" -20	UNF 3/4"-16	200	19
UNF 1/2" -20	UNF 7/8"-14	160	19
UNF 9/16" -18	UNF 9/16"-18	200	24
UNF 9/16" -18	UNF 3/4"-16	200	24
UNF 9/16" -18	UNF 7/8"-14	160	24
UNF 9/16" -18	UN 1 1/16"-12	125	24
UNF 3/4" -16	UNF 3/4"-16	200	49
UNF 3/4" -16	UNF 7/8"-14	160	49
UNF 3/4" -16	UN 1 1/16"-12	125	49
UNF 3/4" -16	UN 1 5/16"-12	100	49
UNF 7/8" -14	UNF 7/8"-14	160	77
UNF 7/8" -14	UN 1 1/16"-12	125	77
UNF 7/8" -14	UN 1 5/16"-12	100	77
UN 1.1/16" -12	UN 1 1/16"-12	125	107
UN 1.1/16" -12	UN 1 3/16"-12	125	107
UN 1.1/16" -12	UN 1 5/16"-12	100	107

Thread 1 (G1)	Thread 2 (G2)	Working Pressure (bar)	Min Torque * (Nm)
UN 1.1/16" -12	UN 1 5/8"-12	80	107
UN 1.3/16" -12	UN 1 3/16"-12	100	107
UN 1.3/16" -12	UN 1 5/16"-12	100	107
UN 1.5/16" -12	UN 1 5/16"-12	100	147
UN 1.5/16" -12	UN 1 5/8"-12	80	147
UN 1.5/16" -12	UN 1 7/8"-12	80	147
UN 1.5/8" -12	UN 1 5/8"-12	80	172
UN 1.5/8" -12	UN 1 7/8"-12	80	172
UN 1.7/8" -12	UN 1 7/8"-12	80	215



DKJ-T Adaptors: Stainless Steel

Union connector, ISO 8434-2, AGJ 37°, straight, stainless steel

Thread 1 + Thread 2 (G1 + G2)	Working Pressure (bar)	*Min Torque (Nm)
UNF 7/16"-20	490	15
UNF 1/2"-20	490	19
UNF 9/16"-18	400	24
UNF 3/4"-16	400	49
UNF 7/8"-14	400	77
UN 1 1/16"-12	330	107
UN 1 5/16"-12	240	147
UN 1 5/8"-12	160	172
UN 1 7/8"-12	160	215

* Recommended minimum torques should not be exceeded by more than 30% during assembly

Adaptors

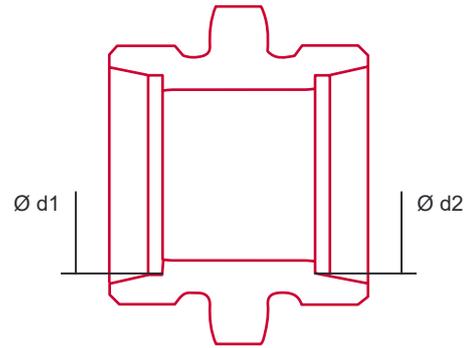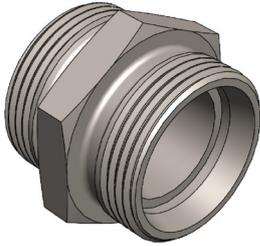


DKOS-T, DKOL-T, DKS-T, DKL-T Adaptors: Steel

Union connector, ISO 8434-1, CELL/CEL/CES 24°, straight, steel


Series	Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
L	6	6	315	30	25
L	8	6	315	30	25
L	8	8	315	50	35
L	10	6	315	30	25
L	10	8	315	50	35
L	10	10	315	70	40
L	12	6	315	30	25
L	12	8	315	50	35
L	12	10	315	70	40
L	12	12	315	90	45
L	15	6	315	30	25
L	15	8	315	50	35
L	15	10	315	70	40
L	15	12	315	90	45
L	15	15	315	150	60
L	18	6	315	30	25
L	18	8	315	50	35
L	18	10	315	70	40
L (Length: 30mm)	18	12	315	90	45
L (Length: 32mm)	18	12	315	90	45
L	18	15	315	150	60
L (Length: 31mm)	18	18	315	210	60
L (Length: 35mm)	18	18	315	210	60
L	22	8	160	50	35
L	22	10	160	70	40

Adaptors

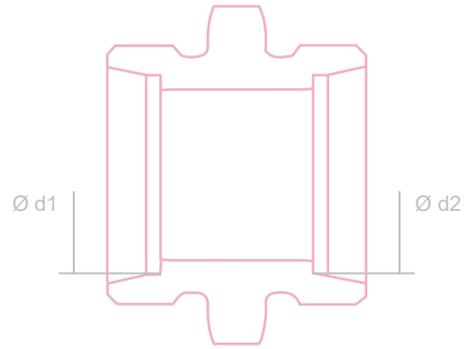

Series	Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
L	22	12	160	90	45
L	22	15	160	150	60
L (Length: 33mm)	22	18	160	210	60
L (Length: 35mm)	22	18	160	210	60
L	22	22	160	210	60
L	28	8	160	50	35
L	28	10	160	70	40
L	28	12	160	90	45
L	28	15	160	150	60
L	28	18	160	210	60
L	28	22	160	210	60
L	28	28	160	380	160
L	35	22	160	210	100
L	35	28	160	380	160
L	35	35	160	550	210
L	42	28	160	380	160
L	42	35	160	550	210
L	42	42	160	700	260
L S	18	16	315	190	N/A
S	6	6	630	60	N/A
S	8	6	630	60	N/A
S	8	8	630	90	N/A
S	10	6	630	60	N/A
S	10	8	630	90	N/A
S	10	10	630	120	N/A
S	12	6	630	60	N/A
S	12	8	630	90	N/A
S	12	10	630	120	N/A
S	12	12	630	170	N/A
S	14	6	630	60	N/A
S	14	8	630	90	N/A



Adaptors

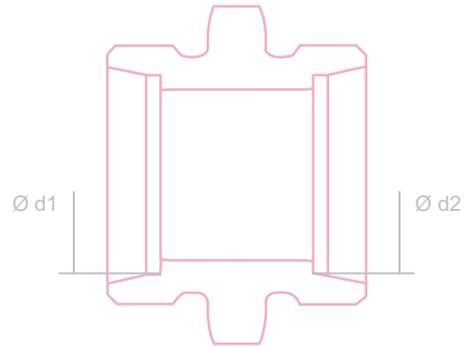

Series		Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
S		14	10	630	120	N/A
S		14	12	630	170	N/A
S		14	14	630	190	N/A
S		16	6	400	60	N/A
S		16	8	400	90	N/A
S		16	10	400	120	N/A
S		16	12	400	170	N/A
S		16	14	400	190	N/A
S		20	10	400	120	N/A
S		20	12	400	170	N/A
S		20	14	400	190	N/A
S		20	16	400	190	N/A
S		20	20	400	320	N/A
S		25	16	400	190	N/A
S		25	20	400	320	N/A
S		25	25	400	450	N/A
S		30	16	400	190	N/A
S		30	20	400	320	N/A
S		30	25	400	450	N/A
S		30	30	400	320	N/A
S		38	16	315	190	N/A
S		38	25	315	450	N/A
S		38	30	315	600	N/A
S		38	38	315	800	N/A
S	L	16	15	315	150	N/A
S	L	20	15	315	150	N/A
S	L	20	18	315	210	N/A
S	L	25	22	150	210	N/A

* Tightening torques for assembly depend on many factors including lubrication, coatings, and surface treatment
L = light; S = heavy

Adaptors

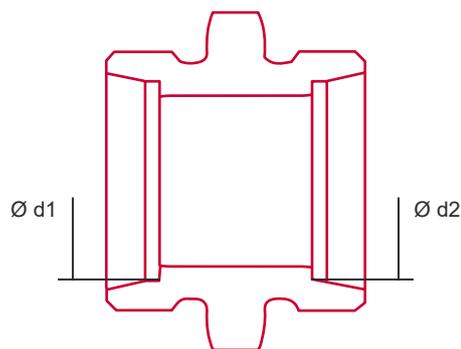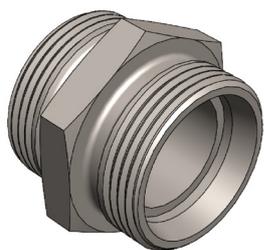


DKOS-T, DKOL-T, DKS-T, DKL-T Adaptors: Stainless Steel

Union connector, ISO 8434-1, CELL/CEL/CES 24°, straight, stainless steel


Series	Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
L	6	6	315	30	25
L	8	6	315	30	25
L	8	8	315	50	35
L	10	6	315	30	25
L	10	8	315	50	35
L	10	10	315	70	40
L	12	6	315	30	25
L	12	8	315	50	35
L	12	10	315	70	40
L	12	12	315	90	45
L	15	6	315	30	25
L	15	8	315	50	35
L	15	10	315	70	40
L	15	12	315	90	45
L	15	15	315	150	60
L	18	8	315	50	35
L	18	10	315	70	40
L	18	12	315	90	45
L	18	15	315	150	60
L	18	18	315	210	60
L	22	10	160	70	40
L	22	12	160	90	45
L	22	15	160	150	60
L	22	18	160	210	60
L	22	22	160	210	60
L	28	10	160	70	40
L	28	12	160	90	45

Adaptors

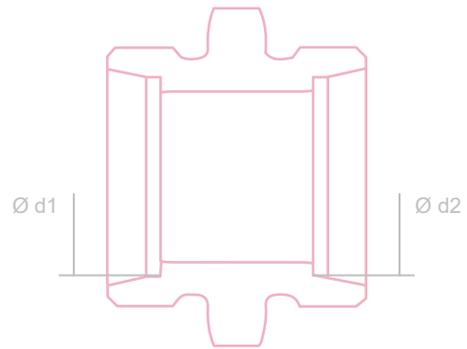


Series	Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
L	28	15	160	150	60
L	28	18	160	210	60
L	28	22	160	210	60
L	28	28	160	380	160
L	35	15	160	150	60
L	35	18	160	210	60
L	35	22	160	210	60
L	35	28	160	380	60
L	35	35	160	550	210
L	42	15	160	150	60
L	42	18	160	210	60
L	42	22	160	210	60
L	42	28	160	380	60
L	42	35	160	550	210
L	42	42	160	700	260
S	6	6	630	60	N/A
S	8	6	630	60	N/A
S	8	8	630	90	N/A
S	10	6	630	60	N/A
S	10	8	630	90	N/A
S	10	10	630	120	N/A
S	12	6	630	60	N/A
S	12	8	630	90	N/A
S	12	10	630	120	N/A
S	12	12	630	170	N/A
S	14	6	630	60	N/A
S	14	8	630	90	N/A
S	14	10	630	120	N/A
S	14	12	630	170	N/A
S	14	14	630	190	N/A
S	16	6	400	60	N/A

Adaptors

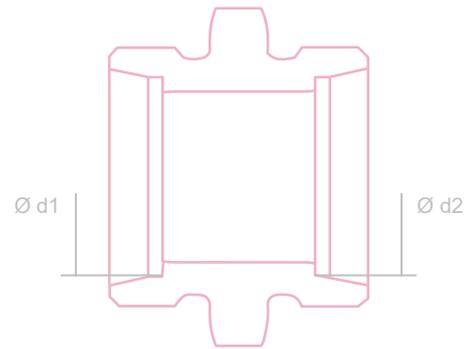

Series	Ø d1	Ø d2	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
S	16	8	400	90	N/A
S	16	10	400	120	N/A
S	16	12	400	170	N/A
S	16	14	400	190	N/A
S	16	16	400	190	N/A
S	20	6	400	60	N/A
S	20	8	400	90	N/A
S	20	10	400	120	N/A
S	20	12	400	170	N/A
S	20	14	400	190	N/A
S	20	16	400	190	N/A
S	20	20	400	320	N/A
S	25	8	400	90	N/A
S	25	10	400	120	N/A
S	25	12	400	170	N/A
S	25	14	400	190	N/A
S	25	16	400	190	N/A
S	25	20	400	320	N/A
S	25	25	400	450	N/A
S	30	10	400	120	N/A
S	30	12	400	170	N/A
S	30	14	400	190	N/A
S	30	16	400	190	N/A
S	30	20	400	320	N/A
S	30	25	400	450	N/A
S	30	30	400	600	N/A
S	38	10	315	120	N/A
S	38	12	315	170	N/A
S	38	14	315	190	N/A
S	38	16	315	190	N/A

Adaptors

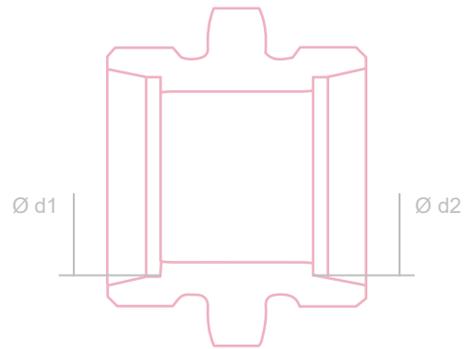

Series	$\varnothing d1$	$\varnothing d2$	Working Pressure (bar)	* Torque (Nm) (metal sealing edge ISO 9974-3 form B)	* Torque (Nm) (O-ring seal ISO 6149-2)
S	38	20	315	320	N/A
S	38	25	315	450	N/A
S	38	30	315	600	N/A
S	38	38	315	800	N/A

* Tightening torques for assembly depend on many factors including lubrication, coatings, and surface treatment
L = light; S = heavy

Installation of Temperature Controlled Hose



1. Remove sealing plugs
2. Utilize Becker spare parts including trumpets, donuts, and supports to mount hose in any application
3. Install hose on inlet and outlet connections.
 - * Ensure hose is oriented with power connection end in optimal position
4. Connect to power source and controller

Best Practices



- Avoid mounting or bending at the sensor location to prevent disruption of sensor readings
- Avoid tension wherever possible
 - * Lengths can be customized for individual applications
- Avoid torsion and kinking along the length of the hose when stationary or in motion
 - * Hose twisting or bending should be limited, but it must take place within the same plane of movement
- Do not compress hose diameter during installation or regular use
 - * OD of hose cannot be reduced more than five percent
- Avoid abrasion and friction along length of hose when in use
- Avoid contact with sharp edges and heated components in application
- Temperature correction factor for Kutting hoses is 0.95 of working pressure >99.9C
- Bend radius is valid for static applications and should be doubled for dynamic applications




Safety Instructions

- All alterations and modifications of this product are strictly prohibited.
- Safe use, inspection, and maintenance of hydraulic hose assemblies must adhere to DGUV Regel 113-020.
- This product is not to be used in explosive environments.
- This product is only to be used within the specified limitations.
- This product is only to be operated under the datasheet specified guidelines of the material being processed.
- This product is not to be operated if visible damage, leaks, or non-functional controls are present.
- This product is only to be handled and operated by trained professionals wearing the required PPE: safety shoes, safety goggles, protective clothing, protective gloves.

All hoses are fully compatible with Becker spare parts.

Explore our complete selection in the [Spare Parts Catalog](#)

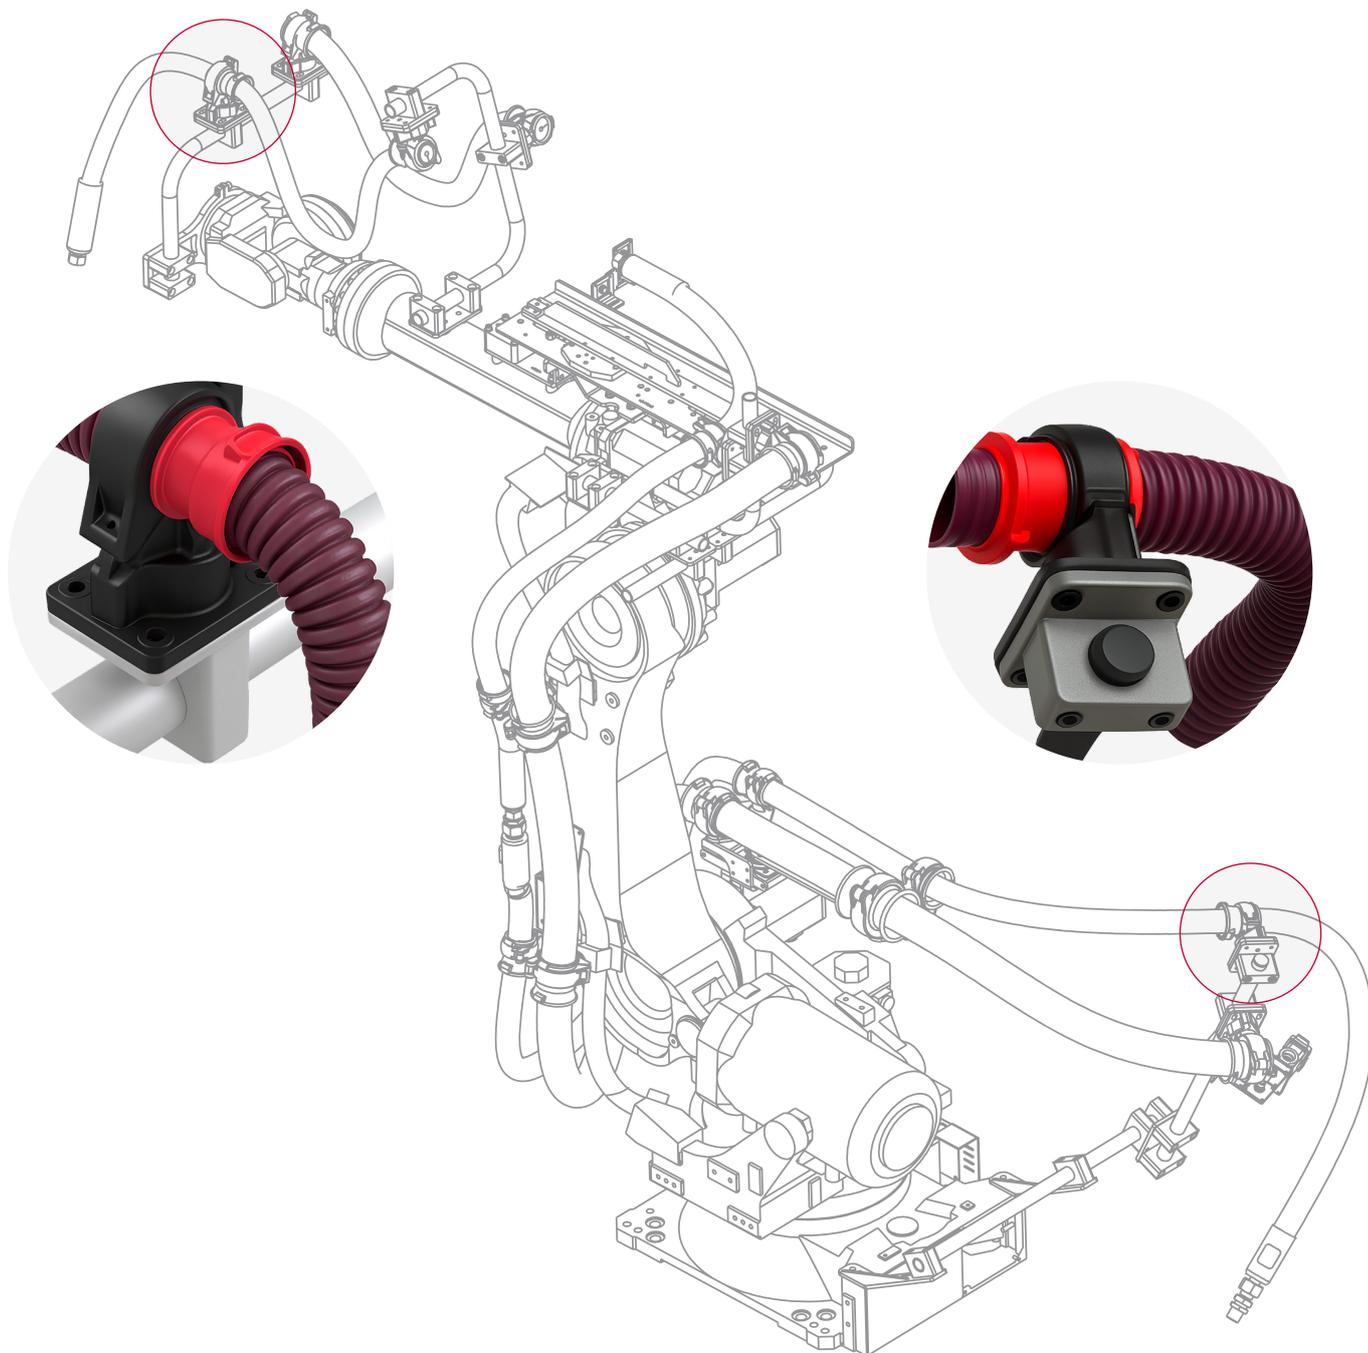

Visit our website for more information!
becker-robotic.com



Becker Robotic – Global Reach, Local Expertise



With a commitment to innovation and customer satisfaction, Becker continues to expand its global footprint while maintaining a personalized approach to client engagement. Our team is dedicated to delivering solutions that not only meet but exceed industry standards, driving success for our partners worldwide.



becker-robotic.com



info@becker-robotic.com

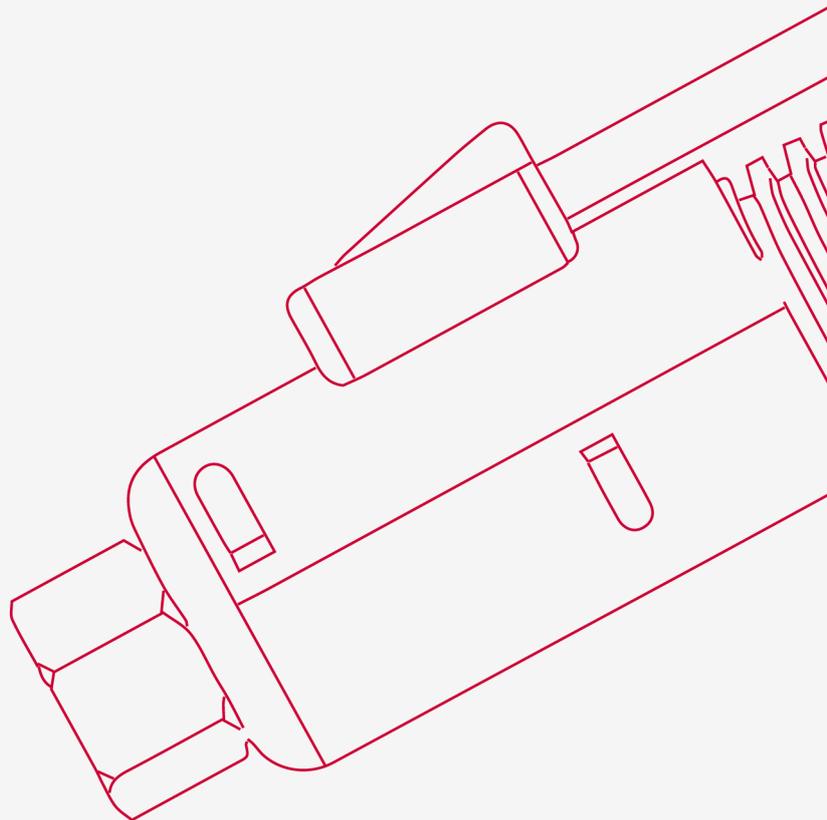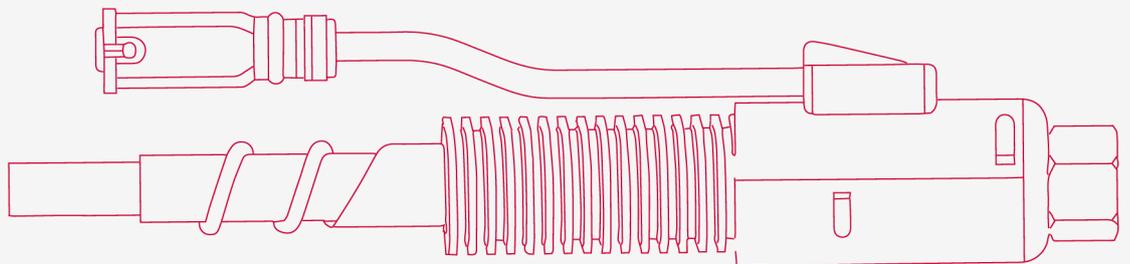

Stay Connected with Becker Robotic!

Follow us on social media & reach out to any of our global offices for more information.